

## Standard LED Displays with a Stylish Design and Basic Functions for Professional Use



50

42



### [ Main Features ]

**High Picture Quality and Ecology**

Featuring a LED backlight and Full-HD LCD panel.

**Slim Design**

A stylish design with large screen and narrow 9 mm (0.4") bezel.

**Versatile Input Terminals**

Standard-equipped input/output terminals for professional use.

For more information about Panasonic Professional Display, please visit:

Professional Display Global Website: [panasonic.net/prodisplay](http://panasonic.net/prodisplay)


YouTube: [www.youtube.com/PanasonicProDisplay](http://www.youtube.com/PanasonicProDisplay)




## High Picture Quality and Ecology

### LED backlight provide light weight, a thin profile, and low power consumption

Detailed Full-HD picture quality, beautiful images in large spaces. The use of an LED backlight allows shops and meeting rooms to be used for long periods with excellent visibility and low power consumption, to help reduce running costs.

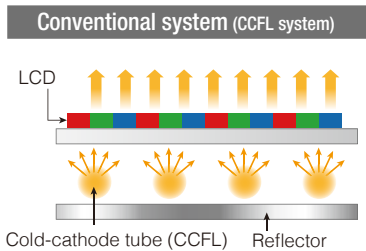

The CCFL system requires the installation of multiple tubes that illuminate in the same way as fluorescent lamps behind the LCD panel. Thus, the display unit becomes thick.

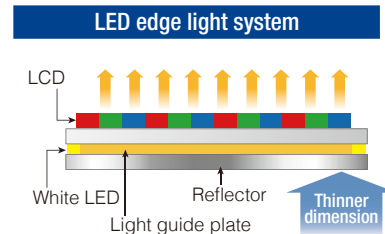


The edge light system requires a small number of LED units because the lights are installed only on the edges of the LCD panel. This saves energy. The display unit can also be made thin and light.

## Slim Design

### A stylish design with large screen and narrow 9 mm (0.4") bezel

The stylish design combines a 9 mm (0.4") bezel and a depth of only 49 mm (2.0"). There is less visual bulk, so the display seems to blend into its surroundings. This makes the image stand out even more, for greater, eye-catching visibility.

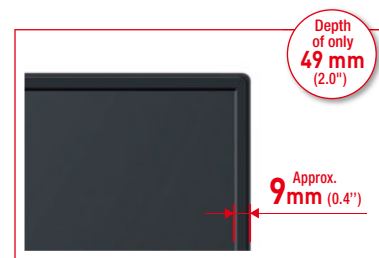

## Product specification

Model No.	TH-50LFE6	TH-42LFE6
<b>DISPLAY</b>		
Screen Size (Diagonal)	50-inch Class (1,257 mm)	42-inch Class (1,067 mm)
Aspect Ratio	16:9	
Panel Type	VA/ E-LED	
Effective Display Area (W x H)	1,095 x 616 mm (43.1" x 24.2")	930 x 523 mm (36.6" x 20.5")
Number of Pixels (H x V)	1,920 x 1,080 pixels	
Brightness	350 cd/m <sup>2</sup>	
Contrast Ratio	5,000 : 1	
Response Time	6.5 ms (G to G)	9.5 ms (G to G)
Viewing Angle (Horizontal/Vertical)	176° / 176°	
<b>CONNECTION TERMINAL</b>		
HDMI In	HDMI Type A Connector x 1	
DVI-D In/Audio In (L/R)	DVI-D 24-pin x 1 / M3 Jack x 1 (Shared with PC In)	
PC In/Audio In (L/R)	Mini D-Sub 15-pin x 1 / M3 Jack x 1 (Shared with DVI-D In)	
<b>CONTROL</b>		
Serial	D-Sub 9-pin x 1, RS-232C Compatible	
LAN	RJ45 10BASE-T/100BASE-TX, Compatible with PLink™	
<b>AUDIO</b>		
Line Out (VAO)	M3 Jack x 1	
Built-in Speakers	10 W [5 W + 5 W]	
<b>ELECTRICAL</b>		
Power Requirements	AC 100-240 V, 50 Hz / 60 Hz	
Power Consumptions	90 W	65 W
Power Off Condition/Stand-by Condition	0.5 W / 0.5 W	
<b>MECHANICAL</b>		
Dimensions (W x H x D)	1,121 x 655 x 49 mm (44.2" x 25.8" x 2.0")	957 x 564 x 49 mm (37.7" x 22.2" x 2.0")
Bezel Width	9 mm (0.4") (L/R/T), 10 mm (0.4") (B)	
Weight	Approx. 18.0 kg (39.7 lbs.)	Approx. 13.5 kg (29.8 lbs.)
<b>ENVIRONMENTAL</b>		
Operating Environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F) / Humidity: 20% to 80% (Non Condensation)	

## Versatile Input Terminals

### Standard-equipped input/output terminals for professional use

The input/output terminals (HDMI, DVI-D, PC-IN) and control terminals (RS232C, LAN) needed for professional use are provided as standard equipment.



## Built-in Speaker

The speaker is built into the rear of the display. There is no need for external speakers when using content that has a soundtrack.



## Optional Accessories

### Pedestal TY-ST42PE6